



AREELED/BL

Reef CCT Adjustable Surface Downlight Black



Features

Durable indoor/outdoor surface mounted downlight suitable for residential and hospitality applications

Choice of matt white or black finishes

Polycarbonate construction ideal for coastal applications

CCT selectable between 3000K, 4000K and 6000K

Unique lockable installation base plate with push fit loop-in loop-out terminals for ease of installation


Non-dimmable

General Information

Lamp Type	LED
Colour / Finish	Black
IP Rating	IP54
IK Rating	IK08
Class Protection	2
Bathroom Zone	2
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L80 54,000h
Warranty (Years)	3
CE Mark	Yes
Diameter (mm)	85 mm
Height (mm)	110 mm

Technical Information

Wattage	5W
Lumens Delivered	480lm (4000K)
Lm/W	97lm/W (4000K)
Beam Angle	90
CRI	80
CCT	3000/4000/6000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-20°C to 40°C
SDCM	6

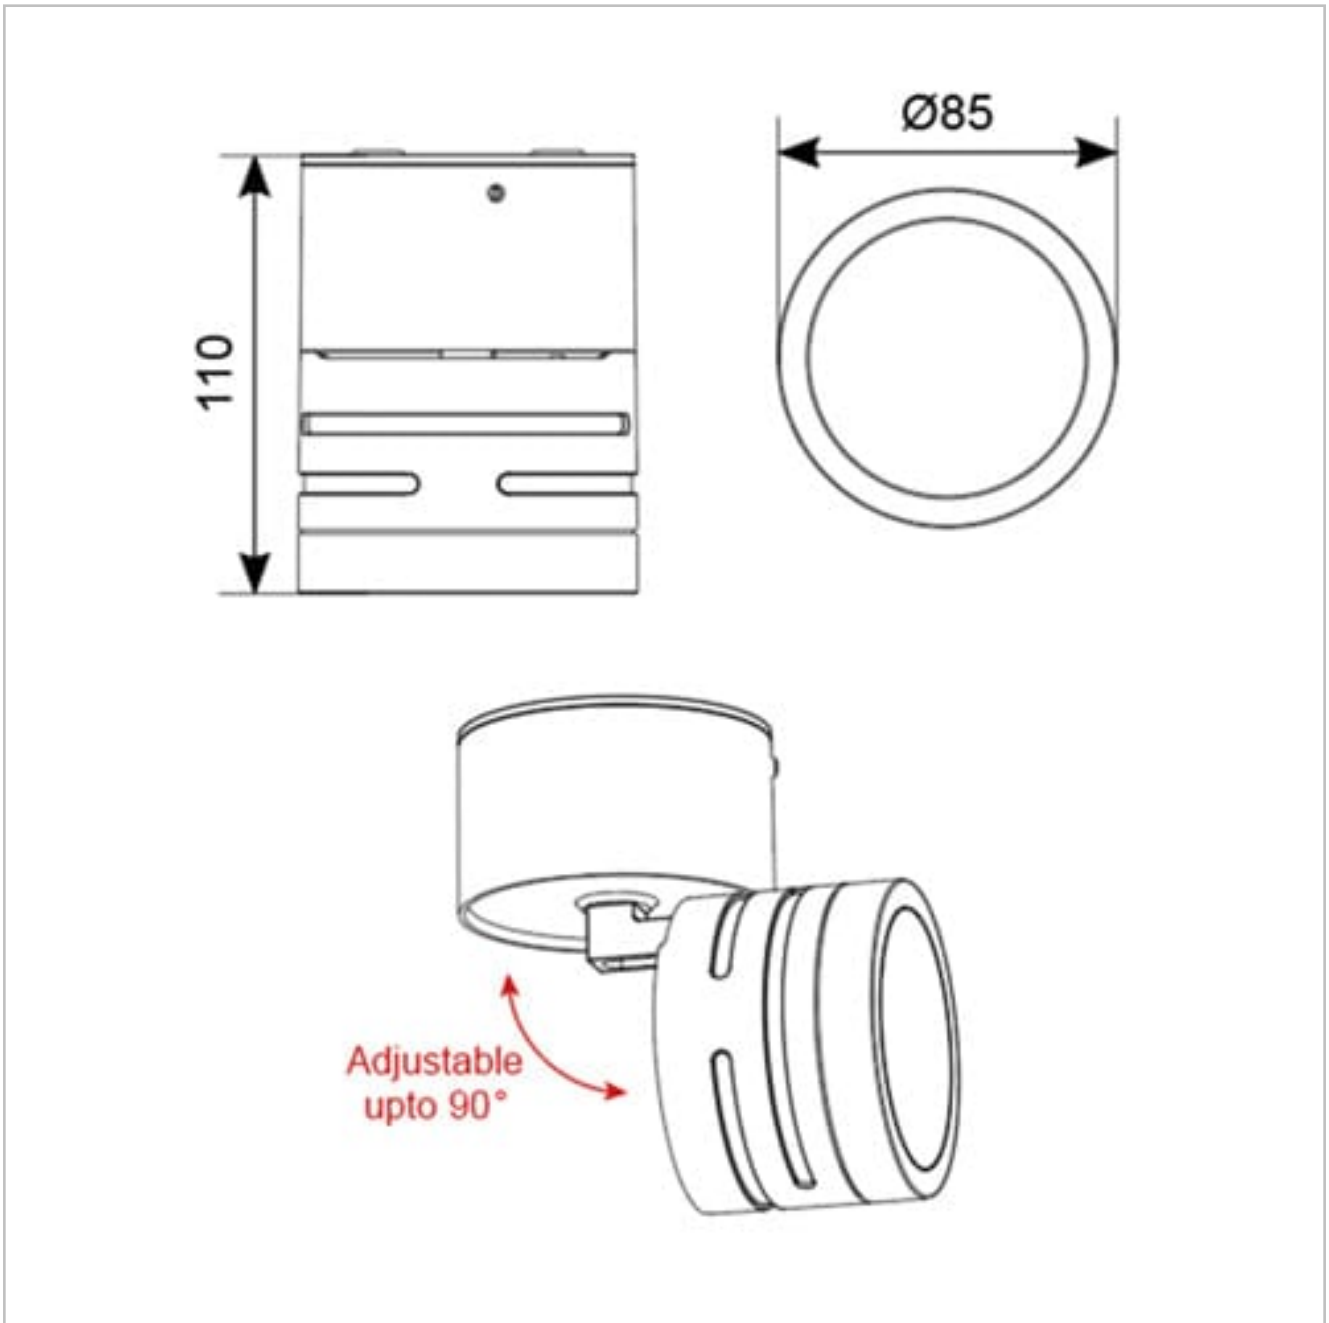

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:08 AM