



collingwood

01604 495 151  
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

# Caiman CSP 5ft Single

CCT Colour Switchable

## Features

<b>IK rating</b>	IK08
<b>IP rating</b>	IP65
<b>CSP Switchable</b>	CCT Switchable
<b>Sensor Option</b>	On-Off Microwave sensor & daylight switching available
<b>Dimmable Option</b>	DALI-2 and 0-10V Dimmable
<b>LED Lifetime</b>	50,000h L70
<b>CRI</b>	80 Ra
<b>SDCM</b>	4 SDCM
<b>Emergency Option</b>	Yes

## Installation information

<b>Install Connector Type</b>	Loop in / Loop out
<b>Inrush Current</b>	30A 0.3ms
<b>Construction Material</b>	Anti-UV Polycarbonate
<b>Maximum Ambient Temperature</b>	-20°C to +40°C
<b>SELV</b>	Yes
<b>UK Building Regulations</b>	Part P
<b>Electric Class (1, 2, 3)</b>	1

## Photometrics @ 25°C

	Finish	Feature I	W	Colour	Beam	lm	lm/W	EM
AC5SN	Grey RAL7005	Standard	30W	3000K - 4000K - 6500K	120°	3450lm - 3900lm - 3750lm	115lm/W - 130lm/W - 125lm/W	N/A
AC5SNE	Grey RAL7005	Emergency	30W	3000K - 4000K - 6500K	120°	3450lm - 3900lm - 3750lm	115lm/W - 130lm/W - 125lm/W	250lm
AC5SNM	Grey RAL7005	On-Off Microwave Sensor	30W	3000K - 4000K - 6500K	120°	3450lm - 3900lm - 3750lm	115lm/W - 130lm/W - 125lm/W	N/A
AC5SNME	Grey RAL7005	Emergency	30W	3000K - 4000K - 6500K	120°	3450lm - 3900lm - 3750lm	115lm/W - 130lm/W - 125lm/W	250lm
AC5SV	Grey RAL7005	0-10V Dimmable	30W	3000K - 4000K - 6500K	120°	3450lm - 3900lm - 3750lm	115lm/W - 130lm/W - 125lm/W	N/A
AC5SVE	Grey RAL7005	Emergency	30W	3000K - 4000K - 6500K	120°	3450lm - 3900lm - 3750lm	115lm/W - 130lm/W - 125lm/W	250lm
AC5SD	Grey RAL7005	DALI-2 Dimmable	30W	3000K - 4000K - 6500K	120°	3450lm - 3900lm - 3750lm	115lm/W - 130lm/W - 125lm/W	N/A
AC5SDE	Grey RAL7005	Emergency	30W	3000K - 4000K - 6500K	120°	3450lm - 3900lm - 3750lm	115lm/W - 130lm/W - 125lm/W	250lm

## Wiring information

<b>Cable Required for Connector</b>	H05RN-F cable diameter 4 - 10mm, max conductor size 3x 1.5mm <sup>2</sup>
<b>Type of Wiring Required</b>	Parallel

## Guarantee

5 years, 2 years on battery, 2 years on-site

## Features & benefits

CCT switchable between 3000K, 4000K & 6500K

Grade 316 Coastal protection kit available

BESA mounting kit available

IP65 for the highest level of dust protection and able to withstand jets of water from any directions

304 stainless steel clips for high corrosion resistance and anti-tamper screws for vandal proofing

IK08 for robust impact protection



Unique gear tray slots that allow us to easily integrate third party control gear for your project. Just ask.

Extended mounting sliders to help make refurbishment easier

Safety tether cable to gear tray enables fast installation

Compression cable gland included in fixings kit

## Beam angle: 120°

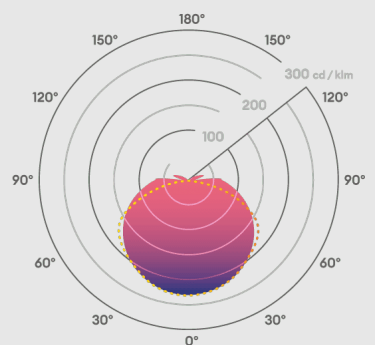


## Accessories


<b>AC5SCLIP316</b>	Coastal application kit	Sold Separately
<b>ACSBESA</b>	BESA mounting kit (indoor only)	Sold Separately
<b>EMBOLTMOPEN</b>	3 hour emergency conversion pack, open area, manual test	Sold Separately
<b>EMBOLTCOR</b>	3 hour emergency conversion pack, corridor area, manual test	Sold Separately
<b>SSENPBSTWH</b>	PIR on/off daylight Sensor	Sold Separately



collingwood

01604 495 151  
[collingwoodlighting.com](http://collingwoodlighting.com)

 [collingwoodled](https://www.instagram.com/collingwoodled)

 [/collingwoodlighting](https://www.facebook.com/collingwoodlighting)

 [collingwoodlighting](https://www.linkedin.com/company/collingwoodlighting)

---

## Caiman CSP 5ft Single

IP65 for the highest level of dust protection and able to withstand jets of water from all directions. 304 stainless steel clips for high corrosion resistance and anti-tamper screws for vandal proofing. IK08 for robust impact protection. Our Caiman anti-corrosive has been designed for the most demanding applications and features a colour temperature switch so you can choose for your light to be warm, cool or daylight. We also feature unique gear tray slots that allow us to easily integrate third party control gear for your project. Just ask.