


Product Code: HC832R

Description: HDview IP 32 Channel 8MP 24/7 4TB Network Video Recorder (NVR)

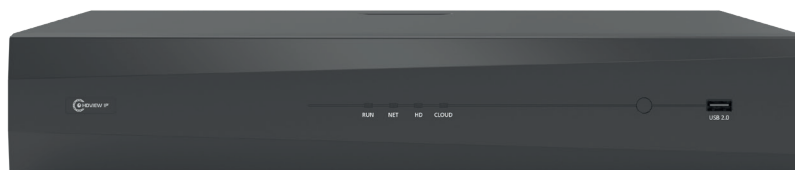

General Information		Recording	
Dimensions (mm)	362 x 400 x 74	Maximum Capacity	10TB (Per Disk)
Weight (Kg)	<5	Internal HDD	4TB (4 x SATA)
Warranty (Years)	3	Recording Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080p, 960p, 720p, D1, 2CIF, CIF
Supply & Power		Environment	
Operating Voltage (V AC)	100 - 240	Operating Temperature (°C)	-10 to +55
Power Consumption (W)	<15	Relative Humidity Resistance (%)	≤ 90% RH (non-condensing)
Inputs & Outputs			
Serial Ports	1 x RS485		
Alarm Inputs	16		
Alarm Outputs	4		
PoE Ports	16		
Video Input Channels	32		
Audio Output Channels (RCA)	1		
PoE Standards	IEEE 802.3at & IEEE 802.3af		
Max. PoE Consumption Available (W)	30 (Per Port), 150 (Total)		
Media Information			
Display Video Output	1 x HDMI, 1 x VGA		
Display Split	1, 4, 6, 8, 9, 16, 25 & 36		
Display Resolutions	HDMI: 4k (3840x2160(30Hz), 1920x1080(60Hz), 1920x1080(50Hz), 1600x1200(60Hz), 1280x1024(60Hz), 1280x720(60Hz), 1024x768(60Hz) VGA: 1920x1080(60Hz), 1920x1080(50Hz), 1280x1024(60Hz), 1280x720(60Hz), 1024x768(60Hz)		
Sync Playback	32 Channel		
Data	RS485		
Network			
Network Connection	1 RJ45 10M, 100M, 1000M self-adaptive Ethernet Interface		
Network Functions	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP		
USB Interface	1 x USB (2.0), 1 x USB (3.0)		
Supplied	USB Mouse, Quickstart Guide, C13 Mains Cable, Server Mounting Brackets & Screws x 2, Auxiliary Terminal Block x 4, Rubber Feet x 4		

Compatible Products Compatible with the range of 24/7 HDview 5MP and 8MP and Rekor IP 2MP Fixed Bullet and Dome Cameras

Accessories	Features
IPIN1POE: 1 Channel POE Injector IPSW4POE: 4 Channel POE Switch IPSW8POE: 8 Channel POE Switch	Corridor Mode Screen (3 & 4), FTP, Schedule, Event Screenshots, Supports ONVIF (Profile S, G, T) Cameras