


Product Code: DPBR655WH

Description: 13A Ingot 1 Gang Double Pole Key Lockable Switched Socket With Neon (Double Plate)

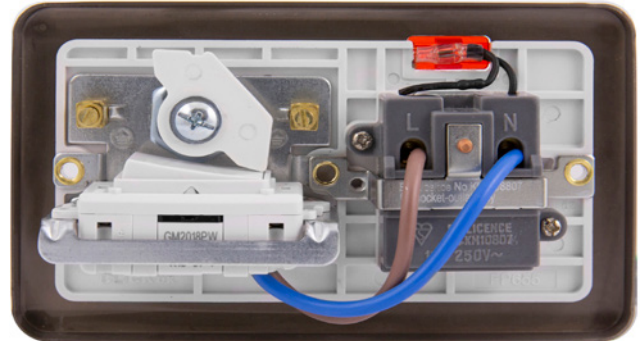

Representative Image

General Information

| | |
|-------------------------|---|
| Dimensions | 146mm (W) x 88mm (H) x 8mm (D) |
| Dimensions With Gasket | 149mm (W) x 91mm (H) x 9mm (D) |
| Plate Design & Finish | Rounded Profile Polished Brass |
| Insert & Gasket Colour | White |
| Materials | Front Plate: Stainless Steel Insert: Urea |
| Maximum Voltage | 250V~ 50Hz |
| Load Rating | 13A |
| Plate Fixing Centres | 120.6mm |
| Terminal Size | 5mmø |
| Terminal Torque | 1.2Nm |
| Terminal Capacity | 3 x 2.5mm ² , 2 x 4mm ² |
| Double Pole | Yes |
| Twin Earth Terminals | Yes |
| Neon Indicator | Yes (Red) |
| Ingress Protection | IP20 |
| Back Box Depth | 35mm Minimum |
| Operational Temperature | -5°C to +40°C |
| Warranty | 10 Years |
| Standards | BS EN 60669-1:1999 +A1:2002 +A2:2008 BS 1363-2: 2016 +A1: 2018 |

Additional Information

Two keys provided (Spare keys available: SP660)
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.