


Product Code: MM025BK

Description: 10AX Intermediate Switch Module

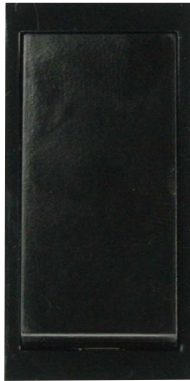

**General Information**

<b>Dimensions (mm)</b>	25 (W) x 50 (H) x 22 (D)	
<b>Finish</b>	Black	
<b>Materials</b>	Switch: Urea	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated	Contacts: Silver "on-lay" Copper / Brass
	Internal Busbars: Formed Pressed Brass	
<b>Anti Microbial Certified</b>	No	
<b>Rated Voltage (V~) (Ue)</b>	250	<b>Frequency (Hz)</b> 50
<b>Inductive Load Rating (AX)</b>	10	
<b>Load Rating Comments</b>	Suitable for Inductive Loads	
<b>Termination Type</b>	Screw	
<b>Terminal Size (mm)</b>	Ø5	<b>Terminal Torque Value (Nm)</b> 1.8
<b>Terminal Capacity - Solid (mm²)</b>	4 x 1.5 or 3 x 2.5	
<b>Modular Rocker Switches</b>	Yes	
<b>Intermediate Switch</b>	Yes	
<b>Minimum Back Box Depth (mm)</b>	25 (35 Flat Plate)	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	1	

**Additional Information** For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.