

## ACR60 / ACR60-LV




### SPECIFICATION KEY FACTS

- Trickle & boost speeds adjustable
- Day logger, hours on trickle and boost, hours boosted by humidity and energy consumption as standard
- Timer adjustable
- Humidity sensor
- 7 year warranty

### ORDER CODES

- ACR60** Continuous running HTP fan with extract performance up to 60l/s
- ACR60-LV** Low voltage continuous running HTP fan with extract performance up to 60l/s

The ACR60 & ACR60-LV continuous running HTP fan has been designed for bathrooms and kitchens, with a selection of trickle and boost speeds from 9, 15, 30 and 60l/s. Comes with a day logger, hours on trickle and boost, hours boosted by humidity and energy consumption as standard. The HTP fan has an adjustable automatic sensing humidity sensor, a timer adjustable between 1 and 30 minutes and, an in-built boost activated by pullcord, a sleek tile front for discreet installation and comes with a 7 year warranty.

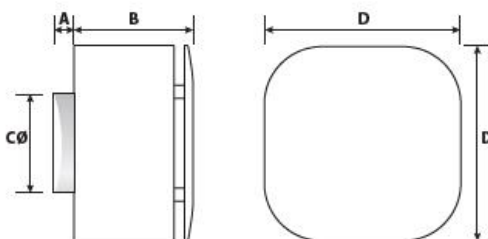

### FAN DIMENSIONS

Casing (mm)	A	B	C	D
	30	132	99	193
Hole diameters (mm)	Walls		107	
	Ceilings		107	
	Windows		117	

### FAN TECHNICAL DATA

Fan motor	24VDC, 2W on trickle, 26W on max boost
Extract capacity	216m <sup>3</sup> /h (60 ltrs/sec)
Trickle dB(A) @ 3m	15

### HUMIDITY SENSOR TECHNICAL DATA

Humidity range	30% RH - 90% RH
Humidity threshold adjustment range	50% RH - 70% RH
Humidity threshold adjustment units	5% RH
Default Humidity Threshold	70% RH