

DATASHEET

Hamilton®

making connections beautifully


Code: 73SS2USBULTBC-W

Hartland | HARTLAND RANGE | USB Power Sockets

Product Image



Wiring

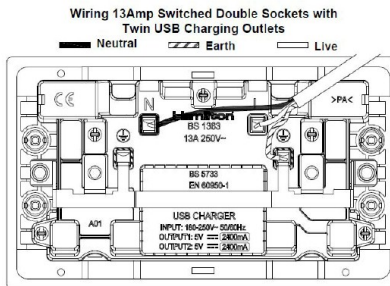


Dimensions

Hamilton®

**HARTLAND
SS2USBX2ULT**

2 gang 13A Double Pole Switched Socket with
2 USB Outlets 2x2.4A (4.8A Total)

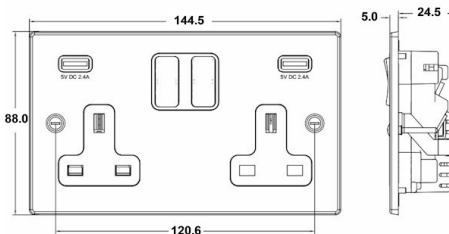

Insert Type

2 gang 13A Double Pole Switched Socket with 2 USB Outlets 2x2.4A (4.8A Total)

Insert Colour

Bright Chrome/White

EAN13 Barcode

5017504090012

Commodity Code

85363010

Luckins TSI

405689194

Dimensions(Nominal)

Double: Height = 88.0mm Width = 144.5mm Depth = 5.0mm

Weight

265 GR

Switched Poles

Double

Current Rating

13 Amp, USB 2 x 2.4A

Voltage

180/250V AC USB = 5V

Maximum Load

13 Amp, USB = 2.4A X 2

Mains Frequency

50/60Hz

IP Rating

IP2XD

Contact Gap Minimum

3mm

Terminal Capacity 1

3x2.5mm²

Terminal Capacity 2

3x4mm²

Terminal Capacity 3

2x6mm² Multi-Strand

Earth Terminal Capacity 1

3x2.5mm²

Earth Terminal Capacity 2

3x4mm²

Earth Terminal Capacity 3

2x6mm² Multi-Strand

Product Class 1

Must be earthed

Ambient Operating Temperature

-15°C to +40°C

Recommended Location

Internal Use Only

Maximum Installation Altitude

2000m

Standard/Approval

BS 1363 BS EN 62368

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 2/28/2023 9:39:49 AM E&OE