

Code: 7G29J45B


## Hartland G2 | HARTLAND G2 RANGE | Telephone and Data Outlets

### Product Image



### Wiring

RJ45 CAT5e Rear View



RJ45 CAT5e and CAT6 Wiring Colour Codes

Pin No.	TIA/EIA Wiring Schedule	Colour Codes	Schedule 444B	Schedule 444B
1	WHITE / Green	WHITE / Orange	WHITE / Green	WHITE / Orange
2	GREEN / White	ORANGE / White	ORANGE / White	GREEN / White
3	WHITE / Orange	WHITE / Green	WHITE / Green	WHITE / Orange
4	BLUE / White	BLUE / White	BLUE / White	BLUE / White
5	WHITE / Blue	WHITE / Blue	WHITE / Blue	WHITE / Blue
6	ORANGE / White	GREEN / White	GREEN / White	ORANGE / White
7	WHITE / Brown	WHITE / Brown	WHITE / Brown	WHITE / Brown
8	BROWN / White	BROWN / White	BROWN / White	BROWN / White

Please always check with the colour coding found on the product.


Cable tie anchor

### Dimensions

**Hamilton®**  
HARTLAND G2

J45

1 gang RJ45 -CAT 5E Outlet Unshielded 8 wire

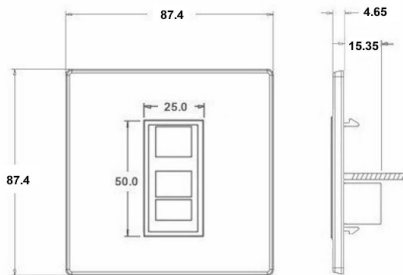

### Insert Type

1 gang RJ45 CAT 5E Outlet - Unshielded

### Insert Colour

Black

### EAN13 Barcode

5051164003180

### Commodity Code

85176990

### Luckins TSI

407517280

### Dimensions(Nominal)

Single: Height = 87.4mm Width = 87.4mm Depth = 4.65mm

### Fixing Hole Centres

Box Fixing = 60.3mm

### Switched Poles

N/A

### Current Rating

n/a

### IP Rating

IP2XD

### Contact Gap Minimum

N/A

### Earth Terminal Capacity 1

5x1mm<sup>2</sup>

### Earth Terminal Capacity 2

4x1.5mm<sup>2</sup>

### Earth Terminal Capacity 3

3x2.5mm<sup>2</sup>

### Earth Terminal Capacity 4

1 x 4mm<sup>2</sup> Multi-Strand

### Earth Terminal Capacity 5

1x6mm<sup>2</sup>

### Product Class 1

Must be earthed (ref BS 7671 415.2.1)

### Ambient Operating Temperature

-5° to +40°C

### Recommended Location

Internal Use Only

### Maximum Installation Altitude

2000m

### Standard/Approval

N/A

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 4/13/2023 12:27:12 PM E&OE